


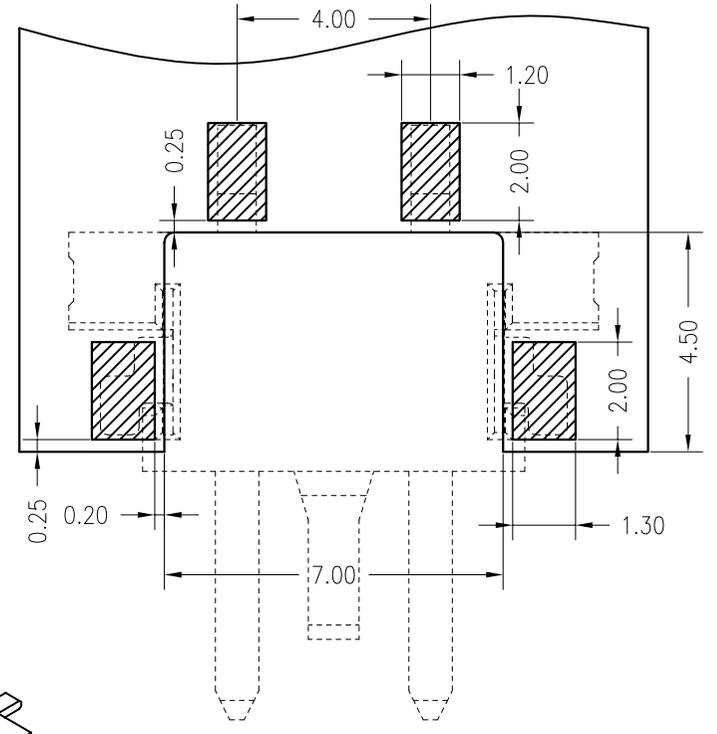
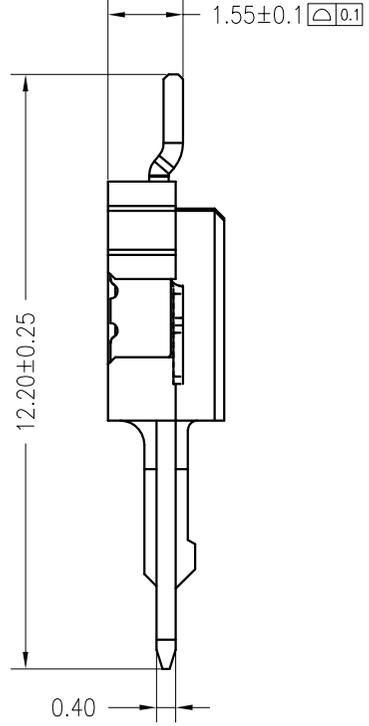


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	-	2017.03.23

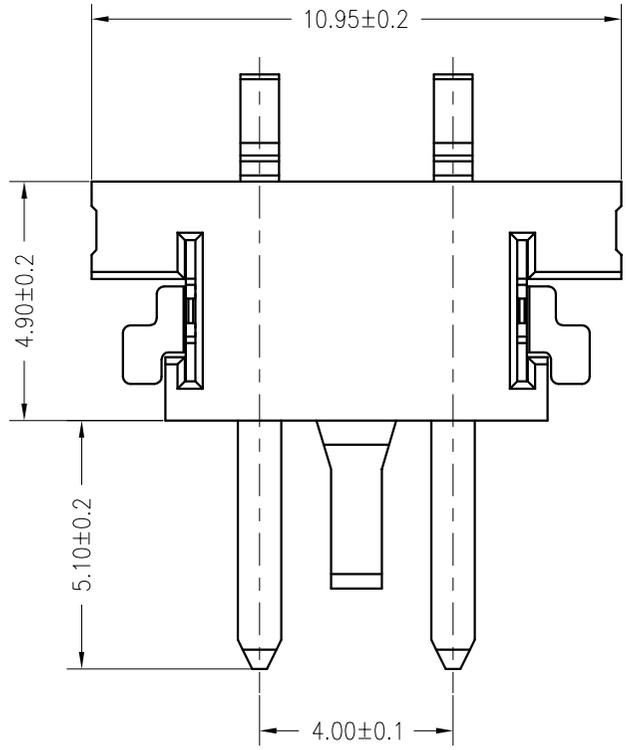

Board Layout

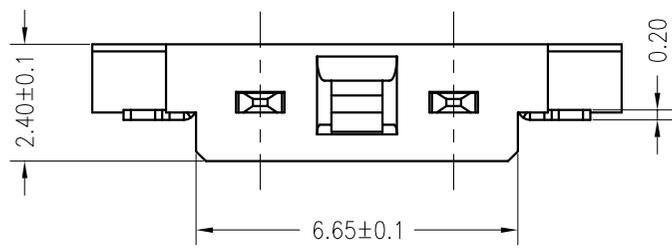

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C	SOLDER TAB	2 PCS	PhosphorBronze	MATTE SN
B	CONTACT	2 PCS	PhosphorBronze	MATTE SN
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.		TITLE: 4.0 板对板 WAFER SMT TYPE	
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.:
.X±0.3	.X±2'		B4001P-02-F4MB1-R
.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.:
--	--	CHKD: 田峰	JKUN-GCKH-0748
UNITS: mm		DR: 蒋建银	SCALE 1 : 1
			SHEET 1 / 1

主要技术参数 Main Specifications

线数 (Poles): 02
 接触电阻 (Contact resistance): ≤30mΩ
 绝缘电阻 (Insulation resistance): ≥1000MΩ
 额定电压 (Rated voltage): 400V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐电压 (Withstand Voltage): 1800V AC/minute
 温度范围 (Temperature Range): -25℃~ +85℃

ORDER INFORMATION:

