
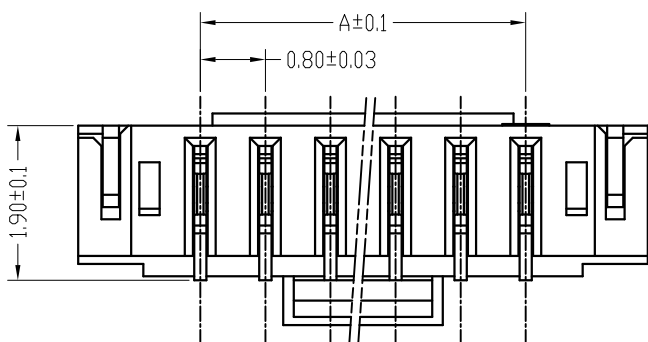
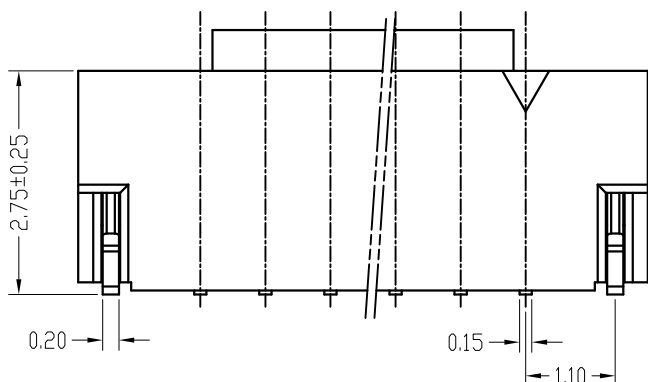
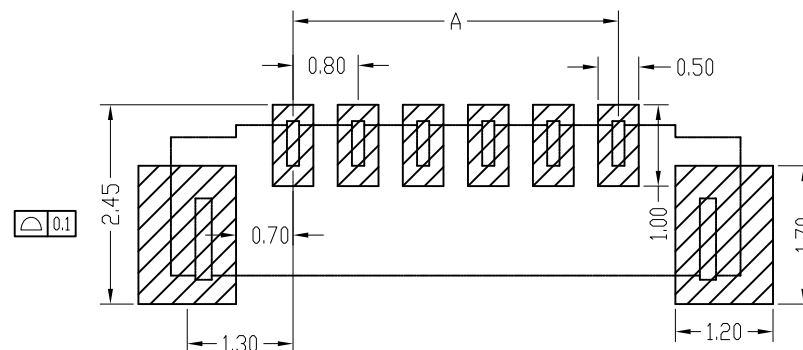



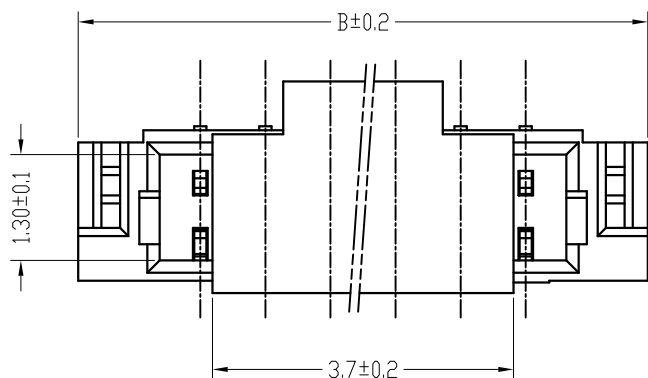


主要技术参数 Main Specifications

线 数 (Poles): 02 to 25
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 100\text{M}\Omega$
额定电压 (Rated voltage): 30V AC DC
额定电流 (Rated current): 0.5A AC DC
耐 电 压 (Withstand Voltage): 200V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ORDER INFORMATION:

PART No. _____		A0801AWV--**--F4M*1--*--X		SPECIAL CODE: X=CAP PACKAGING: B=REEL P=PE Metal code: 1=PhosphorBronze PLATING: B=MATTE Sn C=GOLD
No.OF CIRCUITS: _____		04		
PLASTIC MATERIAL: _____		F4M=LCP(BEIGE)		



PCB LAYOUT

*15	11.2	14.2			
14	10.4	13.4			
*13	9.6	12.6			
12	8.8	11.8			
*11	8.0	11.0	*25	19.2	22.2
10	7.2	10.2	*24	18.4	21.4
9	6.4	9.4	*23	17.6	20.6
8	5.6	8.6	*22	16.8	19.8
7	4.8	7.8	*21	16.0	19.0
6	4.0	7.0	*20	15.2	18.2
5	3.2	6.2	*19	14.4	17.4
4	2.4	5.4	*18	13.6	16.6
3	1.6	4.6	*17	12.8	15.8
2	0.8	3.8	*16	12.0	15.0
孔位	DIM A	DIM B	孔位	DIM A	DIM B

D	CAP	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
C	Soldet TAB	2 PCS	PhosphorBronze	Matte Sn
B	CONTACT	n PCS	PhosphorBronze	Matte Sn-plated/GOLD
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.				TITLE: A0801AWV--** 0.8mmPITCH 180°WAFER SMT TYPE
X.±0.5	X.±5°	USE: CUSTOMER APPD: 邵敬和 CHKD: 田峰	PART NO.: A0801AWV--**F4M*1--X	
.X±0.3	.X±2°		DWG NO.: JKUN-GCCP-0706	
.XX±0.25	.XX±1°		SCALE 1 : 1	
--	--	DR: 吴丹平	SHEET 1 / 1	
⊕	⚡	UNITS: mm		

A

B

C




D

E

F


REV	ECN No.	DESCRIPTION	DESIGN	DATE
AO			吴丹平	2017.06.30

1

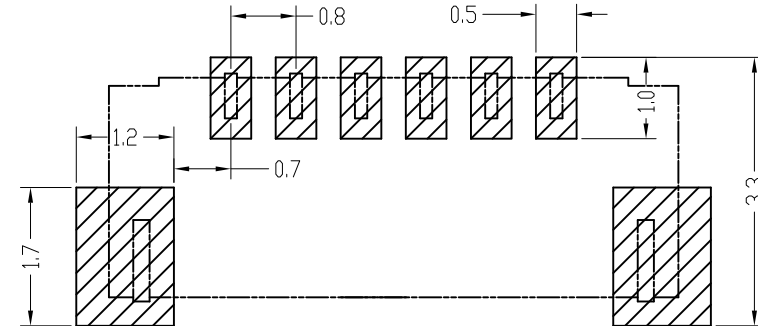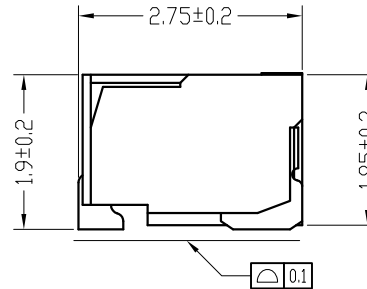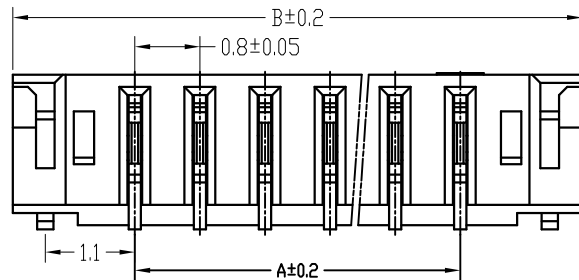

PCB LAYOUT

2

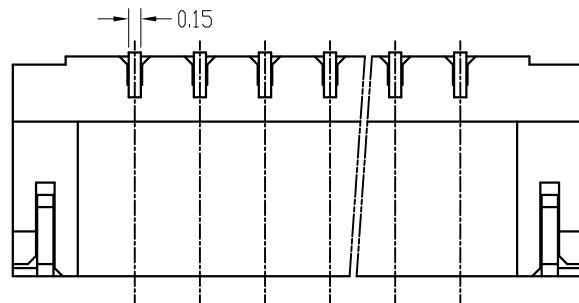

*15	11.2	14.2			
14	10.4	13.4			
*13	9.6	12.6			
12	8.8	11.8			
*11	8.0	11.0	*25	19.2	22.2
10	7.2	10.2	*24	18.4	21.4
9	6.4	9.4	*23	17.6	20.6
8	5.6	8.6	*22	16.8	19.8
7	4.8	7.8	*21	16.0	19.0
6	4.0	7.0	20	15.2	18.2
5	3.2	6.2	*19	14.4	17.4
4	2.4	5.4	*18	13.6	16.6
3	1.6	4.6	*17	12.8	15.8
2	0.8	3.8	*16	12.0	15.0
孔位	DIM A	DIM B	孔位	DIM A	DIM B

主要技术参数 Main Specifications

线 数 (Poles): 02 to 25

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 100\text{M}\Omega$

额定电压 (Rated voltage): 30V AC DC

额定电流 (Rated current): 0.5A AC DC

耐 电 压 (Withstand Voltage): 200V AC/minute



温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ORDER INFORMATION:

PART No.		A0801AWR-**-F4M*1-*		PACKAGING:
No.OF CIRCUITS:		02~25		R=REEL
PLASTIC MATERIAL:		F4M=LCP(BEIGE)		P=PE
				Metal code:
				1=PhosphorBronze
				PLATING:
				B=MATTE Sn
				C=GOLD

3

4

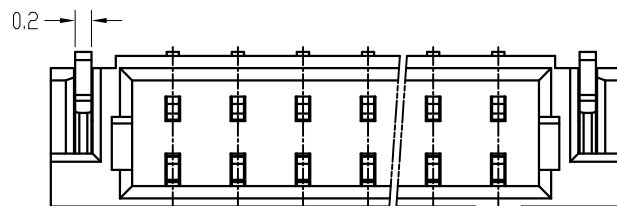

5

A

B

C

D

E

F

C	Solder TAB	2 PCS	PhosphorBronze	Matte Sn-plated/GOLD
B	CONTACT	n PCS	PhosphorBronze	Matte Sn-plated/GOLD
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.				TITLE: A0801AWR-** 0.8mmPITCH 90°WAFER SMT TYPE
X.±0.5	X.±5°	USE: CUSTOMER	PART NO.:	
.X±0.3	.X±2°		A0801AWR-**-F4M*1-*	
.XX±0.25	.XX±1°		DWG NO.:	
--	--	CHKD: 田 峰	JKUN-GCCP-0705	
UNITS: mm		DR: 吴丹平	SCALE 1 : 1	SHEET 1 / 1

A

B



C

D

E

F

REV	DESIGN	DATE
A0	—	—
—	—	—

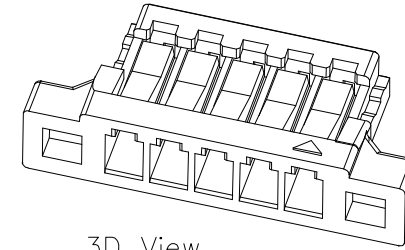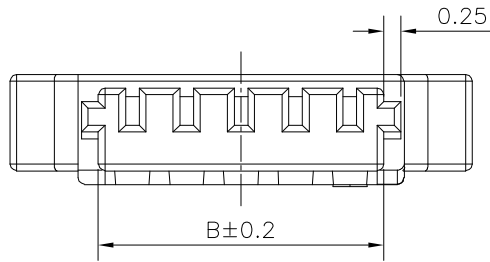

3D View

主要技术参数 Main Specifications

线 数 (Poles): 02 to 24

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$ 绝缘电阻 (Insulation resistance): $\geq 100\text{M}\Omega$

额定电压 (Rated voltage): 30V AC DC


额定电流 (Rated current): 0.5A AC DC

耐 电 压 (Withstand Voltage): 200V AC/minute


温度范围 (Temperature Range) : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ORDER INFORMATION:





PART No.		A0801Y-**-AOW-P-4	SPECIAL CODE:NO.4
No.OF CIRCUITS:		02~24	
PLASTIC MATERIAL:		AOW=PA66(White)	PACKAGING: P=PE G=Tube

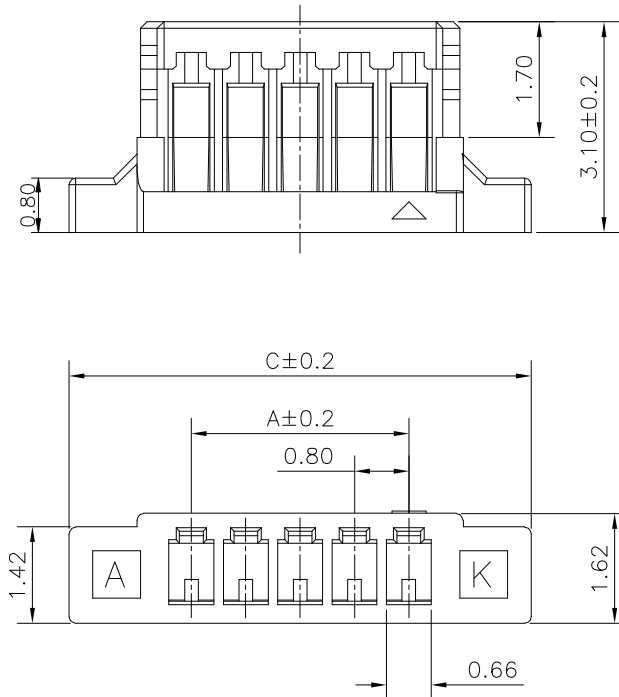


Dimensions			
Pin	A	B	C
2P	0.80	1.80	4.40
3P	1.60	2.60	5.20
4P	2.40	3.40	6.00
5P	3.20	4.20	6.80
6P	4.00	5.00	7.60
7P	4.80	5.80	8.40
8P	5.60	6.60	9.20
9P	6.40	7.40	10.00
10P	7.20	8.20	10.80
11P	8.00	9.00	11.60
12P	8.80	9.80	12.40
13P	9.60	10.60	13.20
14P	10.40	11.40	14.00
15P	11.20	12.20	14.80
16P	12.00	13.00	15.60
17P	12.80	13.80	16.40
18P	13.60	14.60	17.20
19P	14.40	15.40	18.00
20P	15.20	16.20	18.80



C					
B					
A	HOUSING		1 PCS	PA66	UL 94V-0, COLOR:WHITE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH	
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.					TITLE: HOUSING —
X.±0.5	X.±5°	USE: CUSTOMER	PART NO.:		
.X±0.3	.X±2°		A0801Y-**-AOW-P-4		
.XX±0.25	.XX±1°	APPD: 刘振岭	DWG NO.:		
—	—	CHKD: 王亮	—		
⊕	≡	UNITS: mm	DR: 蒋建银	SCALE 1 : 1	SHEET 1 / 1

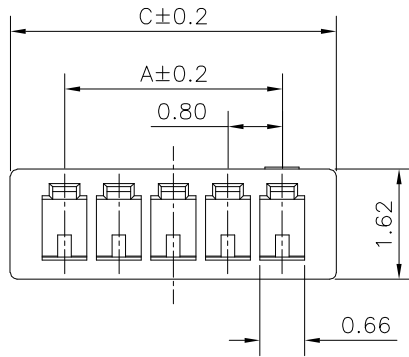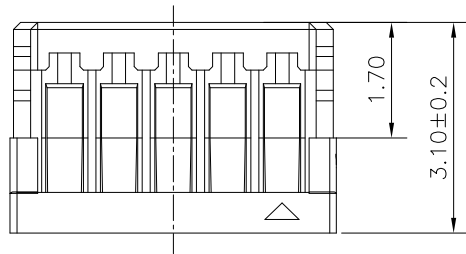

Dimensions			
Pin	A	B	C
2P	0.80	1.80	2.40
3P	1.60	2.60	3.20
4P	2.40	3.40	4.00
5P	3.20	4.20	4.80
6P	4.00	5.00	5.60
7P	4.80	5.80	6.40
8P	5.60	6.60	7.20
9P	6.40	7.40	8.00
10P	7.20	8.20	8.80
11P	8.00	9.00	9.60
12P	8.80	9.80	10.40
13P	9.60	10.60	11.20
14P	10.40	11.40	12.00
15P	11.20	12.20	12.80
16P	12.00	13.00	13.60
17P	12.80	13.80	14.40
18P	13.60	14.60	15.20
19P	14.40	15.40	16.00
20P	15.20	16.20	16.80



3D View

主要技术参数 Main Specifications

线 数 (Poles): 02 to 24

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 100\text{M}\Omega$

额定电压 (Rated voltage): 30V AC DC


额定电流 (Rated current): 0.5A AC DC


耐 电 压 (Withstand Voltage): 200V AC/minute


温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ORDER INFORMATION:

PART No.		A0801Y-**-AOW-P-5	SPECIAL CODE:NO.5
No.OF CIRCUITS:		02~24	
PLASTIC MATERIAL:		AOW=PA66(White)	PACKAGING: P=PE G=Tube

C					
B					
A	HOUSING		1 PCS	PA66	UL 94V-0, COLOR:WHITE
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.					TITLE: HOUSING -
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.:		
.X±0.3	.X±2'		A0801Y-**-A0W-P-5		
.XX±0.25	.XX±1'	APPD: 刘振岭	DWG NO.:		
--	--	CHKD: 王亮	-		
	UNITS: mm	DR: 蒋建银	SCALE 1 : 1		SHEET 1 / 1

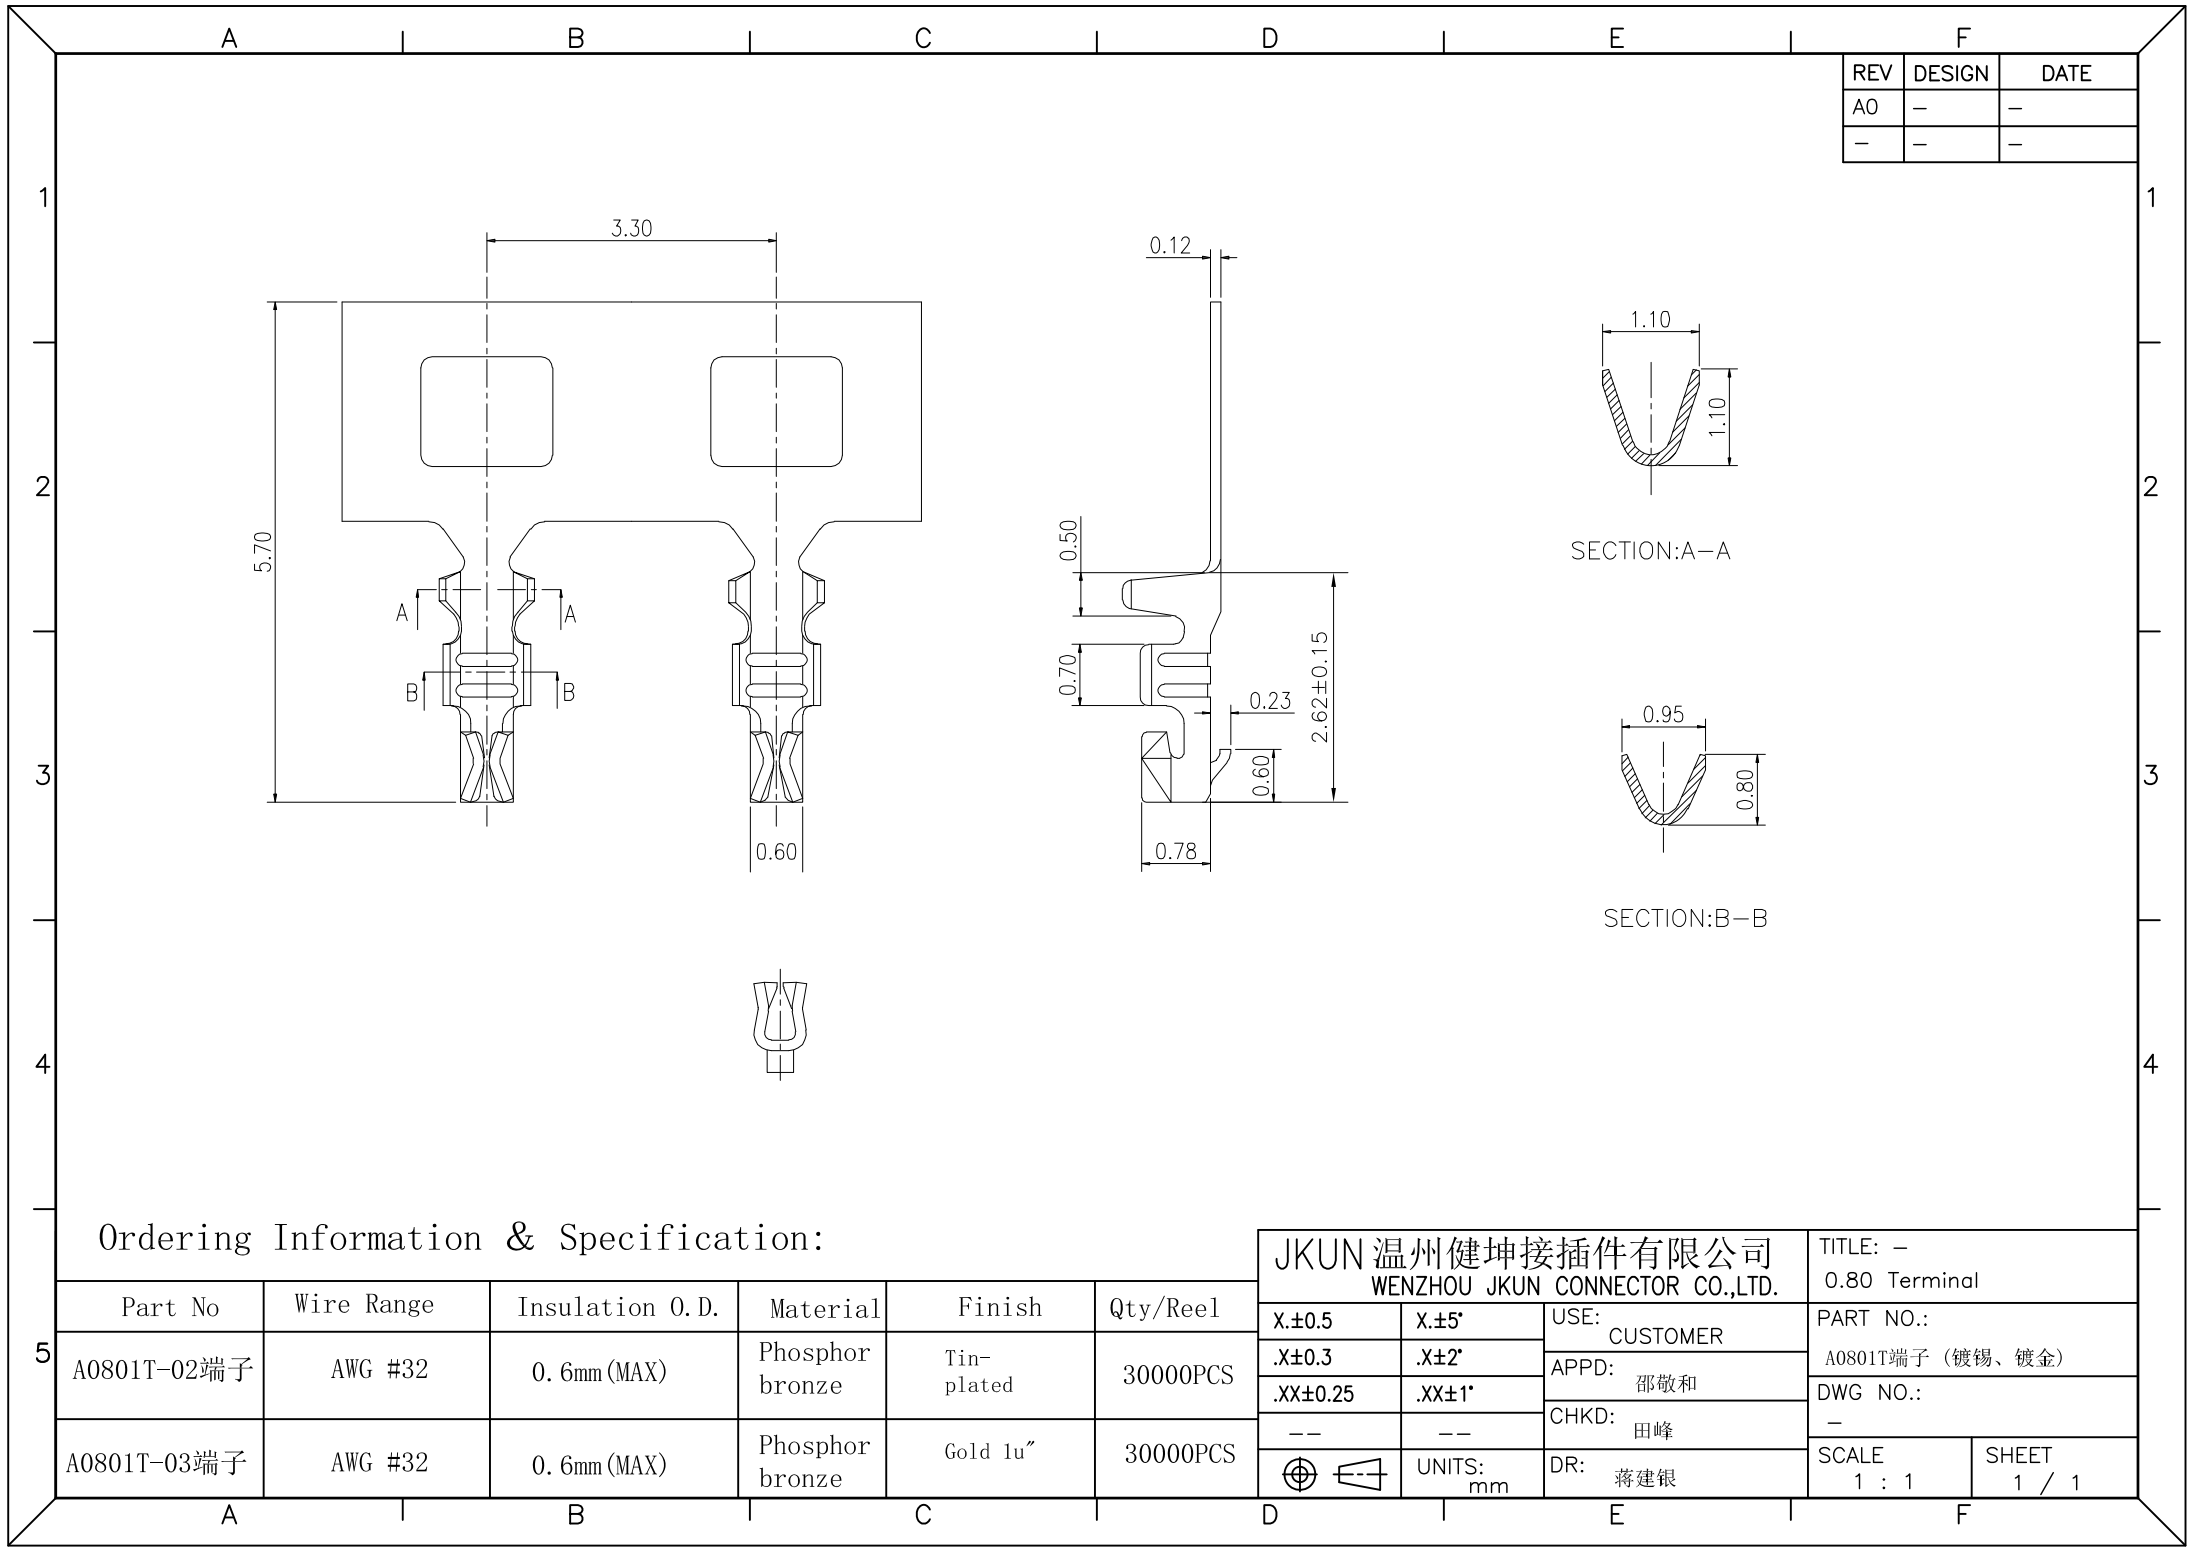

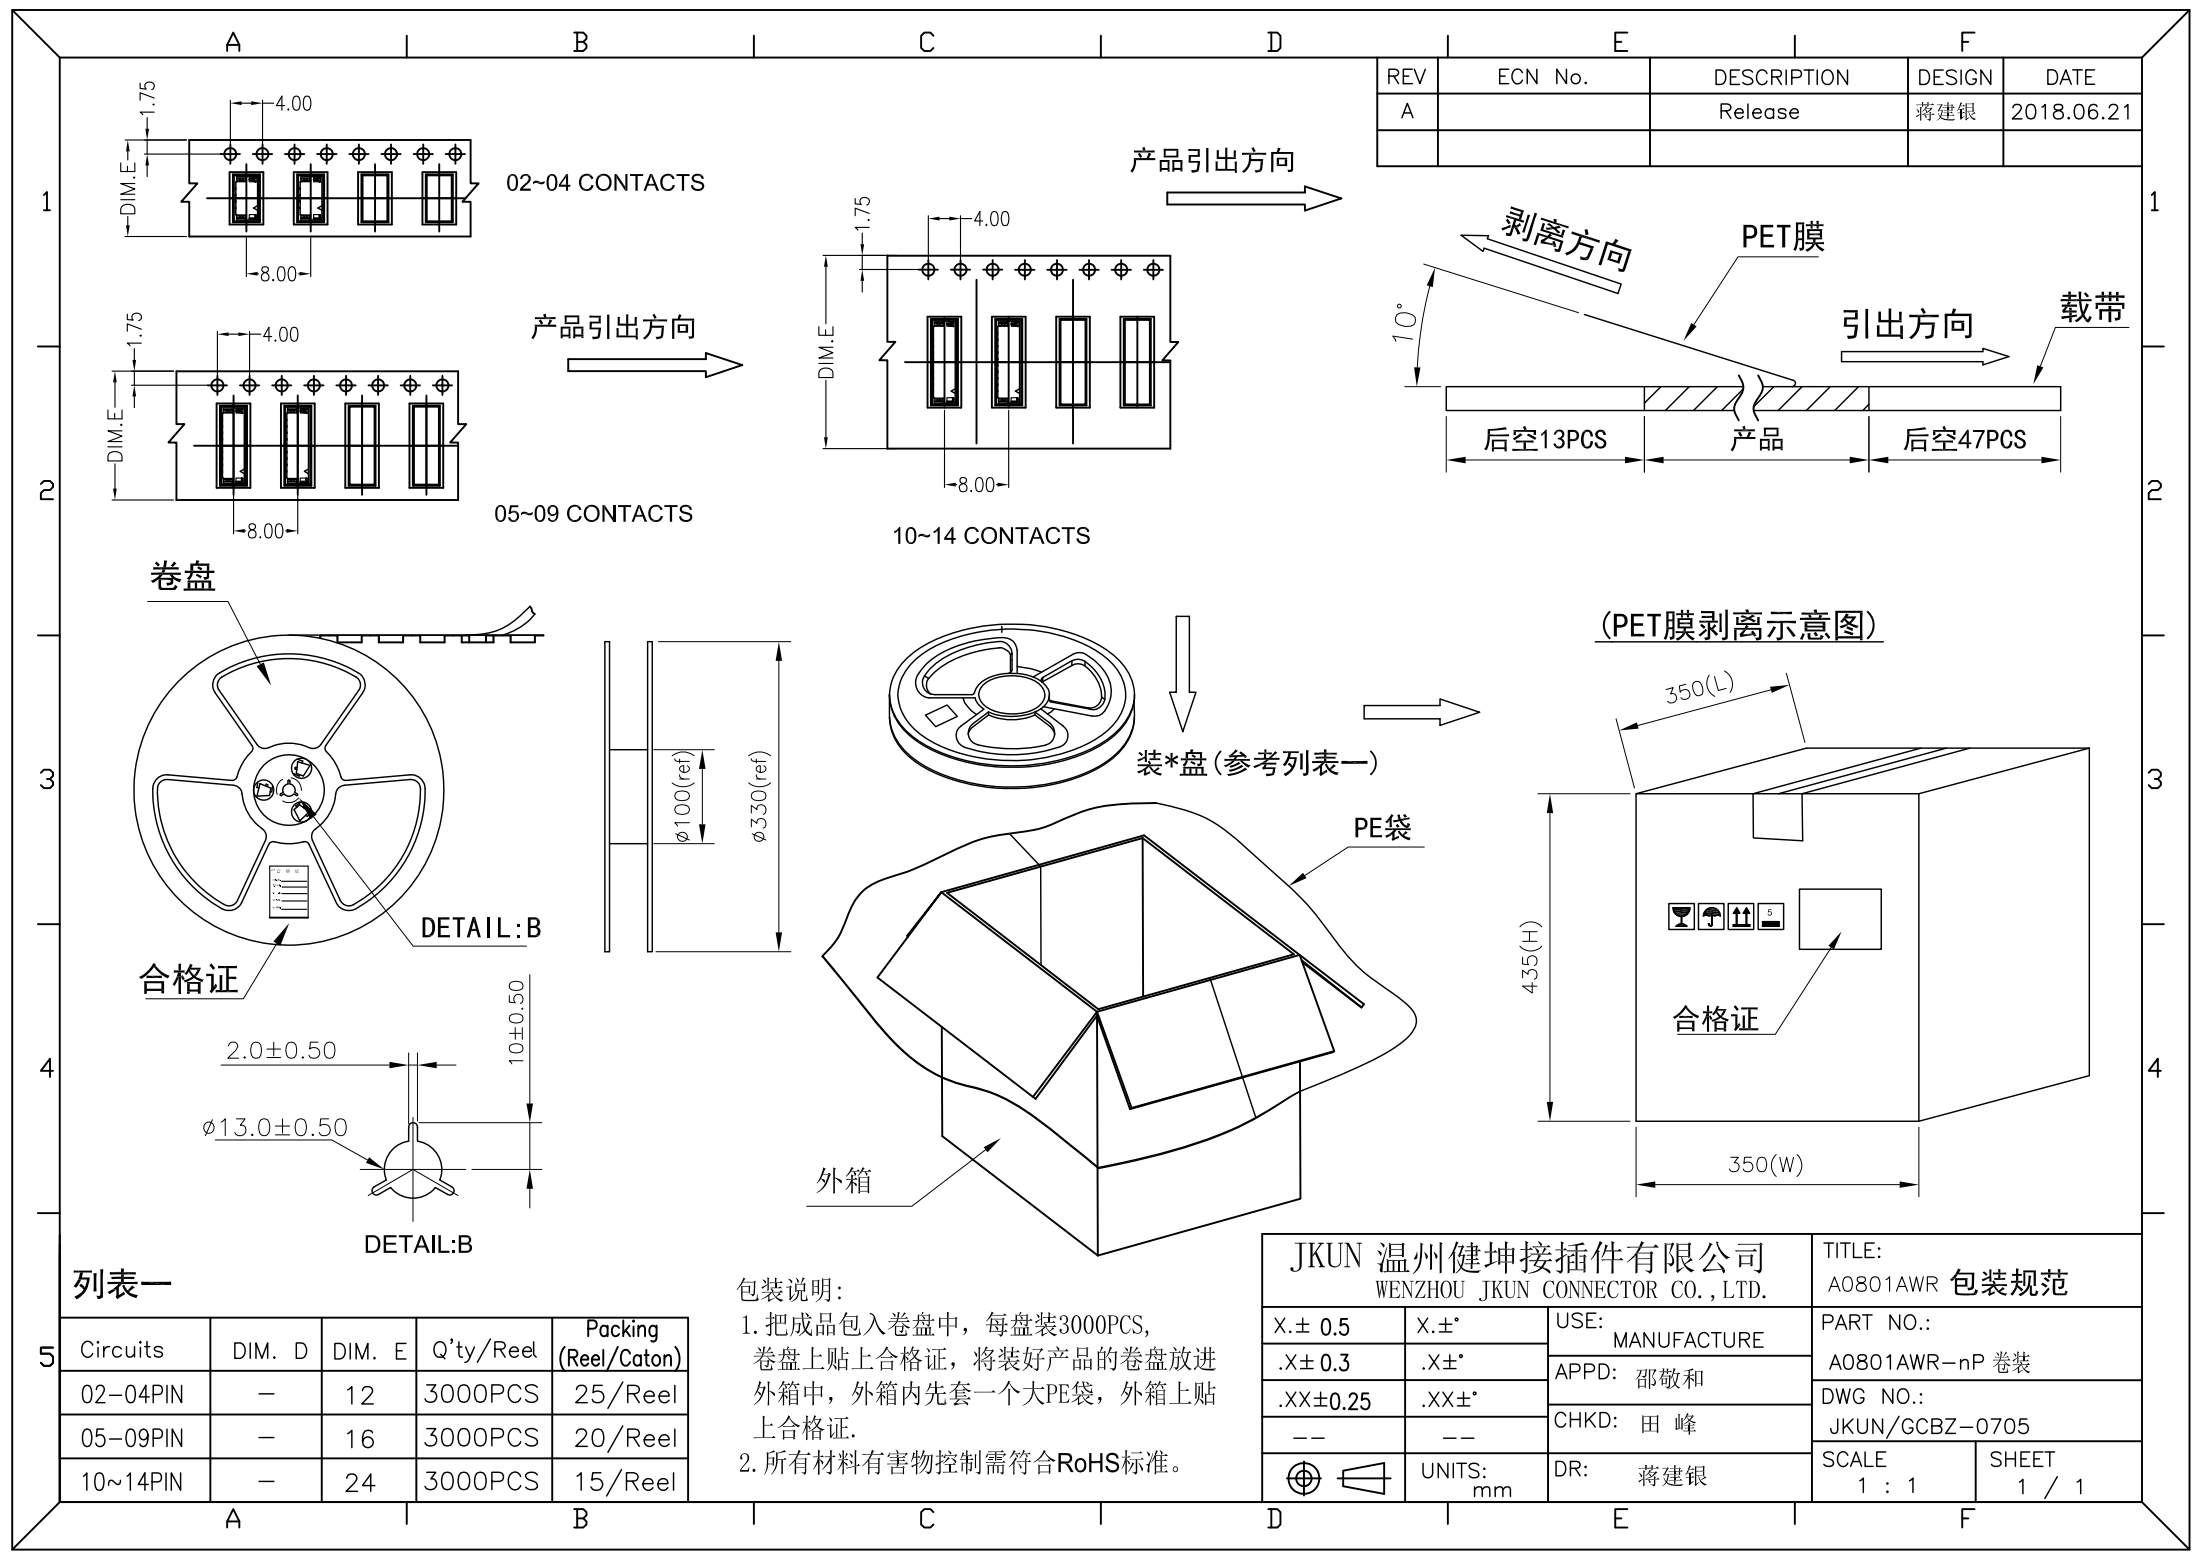

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A		Release	蒋建银	2018.06.21


列表一

Circuits	DIM. D	DIM. E	Q'ty/Reel	Packing (Reel/Caton)
02~04PIN	—	12	3000PCS	25/Reel
05~09PIN	—	16	3000PCS	20/Reel
10~14PIN	—	24	3000PCS	15/Reel


包装说明:

- 把成品包入卷盘中, 每盘装3000PCS, 卷盘上贴上合格证, 将装好产品的卷盘放进外箱中, 外箱内先套一个大PE袋, 外箱上贴上合格证.
- 所有材料有害物控制需符合RoHS标准.


JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.			TITLE: A0801AWR 包装规范	
X.± 0.5	X.±°	USE: MANUFACTURE	PART NO.: A0801AWR-nP 卷装	
.X± 0.3	.X±°		DWG NO.: JKUN/GCBZ-0705	
.XX±0.25	.XX±°	CHKD: 田 峰	SCALE 1 : 1	
--	--	DR: 蒋建银	SHEET 1 / 1	
⊕	⊖	UNITS: mm		

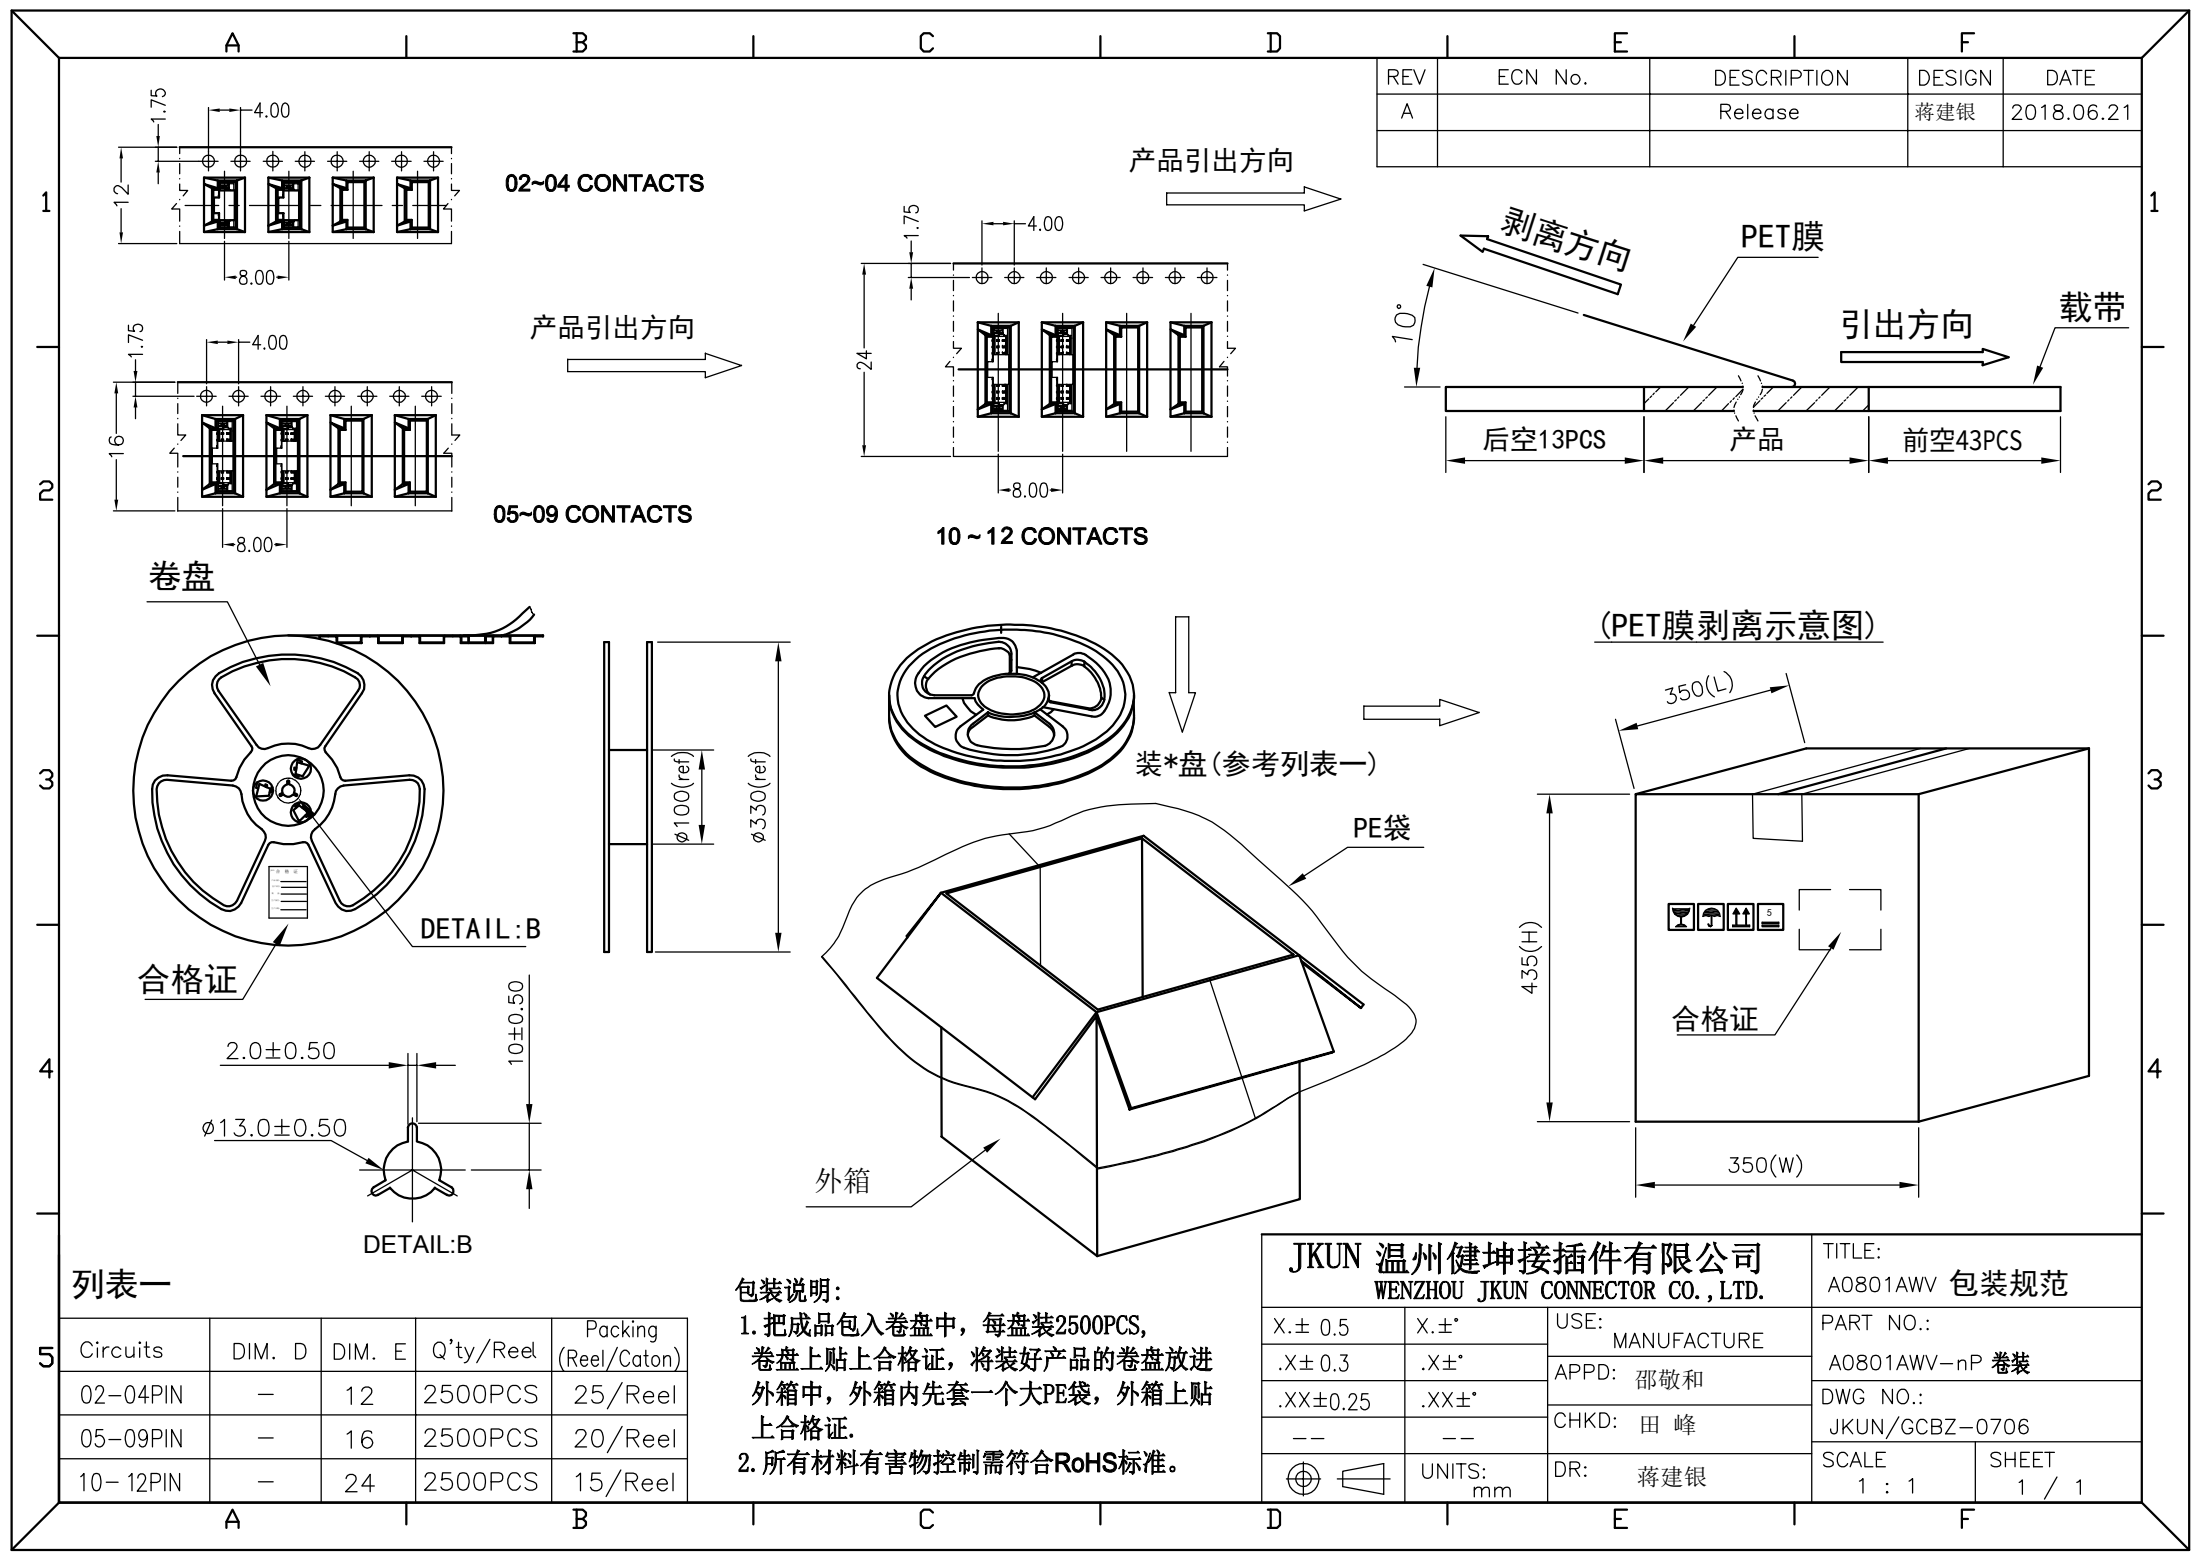

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A		Release	蒋建银	2018.06.21

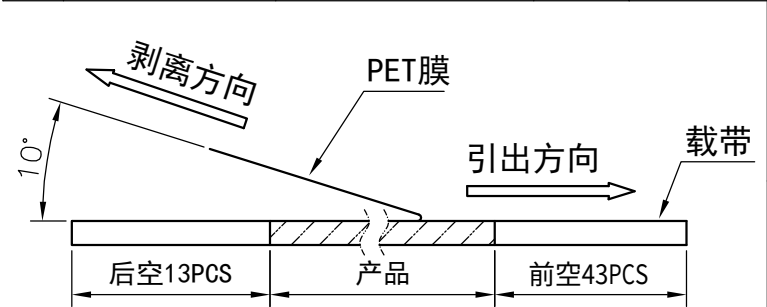

(PET膜剥离示意图)

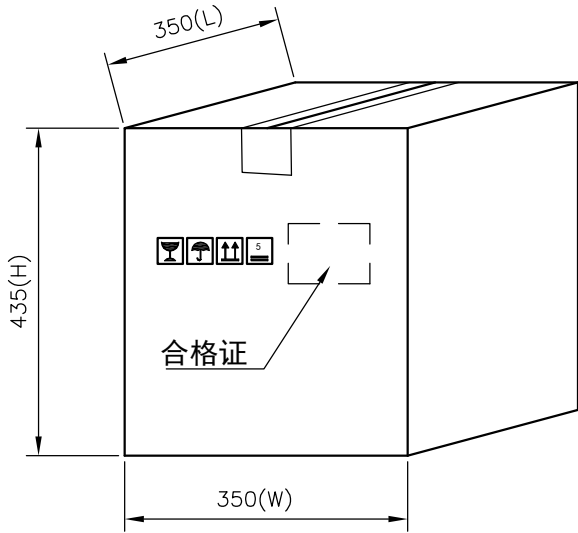

列表一

Circuits	DIM. D	DIM. E	Q'ty/Reel	Packing (Reel/Caton)
02-04PIN	—	12	2500PCS	25/Reel
05-09PIN	—	16	2500PCS	20/Reel
10-12PIN	—	24	2500PCS	15/Reel

包装说明:

- 把成品包入卷盘中, 每盘装2500PCS, 卷盘上贴上合格证, 将装好产品的卷盘放进外箱中, 外箱内先套一个大PE袋, 外箱上贴上合格证.
- 所有材料有害物控制需符合RoHS标准.

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.			TITLE: A0801AWW 包装规范	
X.± 0.5	X.±*	USE:	PART NO.:	
.X± 0.3	.X±*	MANUFACTURE	A0801AWW-nP 卷装	
.XX±0.25	.XX±*	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田 峰	JKUN/GCBZ-0706	
⊕	⊖	UNITS: mm	DR: 蒋建银	SCALE
				1 : 1
				SHEET
				1 / 1